## EDGEWATER CONDOMINIUMS OF BROWARD EWC - BUILDING 14 8741 WILES ROAD CORAL SPRINGS, FLORIDA



FLORIDA TECHNICAL, INC.

114 WEST DAVIS BLVD

TAMPA, FLORIDA 33606

813-765-0264 \* 813-699-8323 (FAX)

THOMAS.FLTECH@GMAIL.COM

## **Uniform Mitigation Verification Inspection Form**

Maintain a copy of this form and any documentation provided with the insurance policy

| Inspection                                 | Inspection Date: Aug 25, 2022  |  |  |   |  |  |  |  |
|--|--|--|--|---|--|--|--|--|
|  | Owner Information  |  |  |   |  |  |  |  |
| Owner Name: EDGEWATER CONDOMINIUM - EWC 14 |  |  |  | Contact Person: E. HE                                     | Contact Person: E. HERRON                    |  |  |  |
| Address: 8741 WILES ROAD                   |  |  |  | Home Phone:   | Home Phone:                                  |  |  |  |
|  | CORAL SPRINGS  | Zip: 33067   |  | Work Phone: 954-344                                       | -3601  |  |  |  |
| County:                                    | BROWARD  |  |  | Cell Phone:   |  |  |  |  |
| Insuranc                                   | e Company:   |  |  | Policy #:   | Policy #:                                    |  |  |  |
| Year of                                    | Home: 1986   | # of Stories: 3  |  | Email:  |  |  |  |  |
| accomp                                     | NOTE: Any documentation used in validating the compliance or existence of each construction or mitigation attribute must accompany this form. At least one photograph must accompany this form to validate each attribute marked in questions 3 though 7. The insurer may ask additional questions regarding the mitigated feature(s) verified on this form.   |  |  |   |  |  |  |  |
| the I                                      | <ol> <li>Building Code: Was the structure built in compliance with the Florida Building Code (FBC 2001 or later) OR for homes located in the HVHZ (Miami-Dade or Broward counties), South Florida Building Code (SFBC-94)?         <ul> <li>A. Built in compliance with the FBC: Year Built For homes built in 2002/2003 provide a permit application with a date after 3/1/2002: Building Permit Application Date (MM/DD/YYYY)/</li> <li>B. For the HVHZ Only: Built in compliance with the SFBC-94: Year Built For homes built in 1994, 1995, and 1996 provide a permit application with a date after 9/1/1994: Building Permit Application Date (MM/DD/YYYY)//</li> <li>C. Unknown or does not meet the requirements of Answer "A" or "B"</li> </ul> </li> <li>Roof Covering: Select all roof covering types in use. Provide the permit application date OR FBC/MDC Product Approval number</li> </ol>  |  |  |   |  |  |  |  |
|  | Year of Original Installation/Replering identified.  | acement OR indicate that   | no information was a   | available to verify complian                              |  |  |  |  |
|  | Per 2.1 Roof Covering Type:  | mit Application<br>Date  | FBC or MDC<br>Product Approval #   | Year of Original Installation or<br>Replacement           | No Information<br>Provided for<br>Compliance |  |  |  |
|  | Asphalt/Fiberglass Shingle   | / /  |  |   |  |  |  |  |
|  | 2. Concrete/Clay Tile  | 3/,19/,13  | FL7804-R7  | 2013  | $\overline{\Box}$                            |  |  |  |
|  | 3. Metal   |  |  |   | Ħ  |  |  |  |
|  | 4. Built Up  | <u> </u>   |  |   |  |  |  |  |
|  | _  | <u> </u>   |  |   | $\exists$                                    |  |  |  |
|  | 5. Membrane  | <u>/ /</u>   |  |   | $\vdash$                                     |  |  |  |
|  | 6. Other   | / /  |  |   | Ш  |  |  |  |
|  | <ul> <li>A. All roof coverings listed above meet the FBC with a FBC or Miami-Dade Product Approval listing current at time of installation OR have a roofing permit application date on or after 3/1/02 OR the roof is original and built in 2004 or later.</li> <li>B. All roof coverings have a Miami-Dade Product Approval listing current at time of installation OR (for the HVHZ only) a roofing permit application after 9/1/1994 and before 3/1/2002 OR the roof is original and built in 1997 or later.</li> </ul>  |  |  |   |  |  |  |  |
|  | C. One or more roof coverings do   | not meet the requirement   | ts of Answer "A" or "  | В".   |  |  |  |  |
|  | D. No roof coverings meet the req  | uirements of Answer "A   | " or "B".  |   |  |  |  |  |
| 3. <b>Roo</b>                              | f Deck Attachment: What is the   | weakest form of roof dec   | k attachment?  |   |  |  |  |  |
|  | A. Plywood/Oriented strand board (OSB) roof sheathing attached to the roof truss/rafter (spaced a maximum of 24" inches o.c.) by staples or 6d nails spaced at 6" along the edge and 12" in the fieldOR- Batten decking supporting wood shakes or wood shinglesOR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that has an equivalent mean uplift less than that required for Options B or C below.  B. Plywood/OSB roof sheathing with a minimum thickness of 7/16"inch attached to the roof truss/rafter (spaced a maximum of 24"inches o.c.) by 8d common nails spaced a maximum of 12" inches in the fieldOR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that is shown to have an equivalent or greater resistance than 8d nails spaced a maximum of 12 inches in the field or has a mean uplift resistance of at least 103 psf.  |  |  |   |  |  |  |  |
|  | C. Plywood/OSB roof sheathing 24"inches o.c.) by 8d common nadecking with a minimum of 2 nailors Initials TEC Property Additional TEC Property Additio | with a minimum thicknes<br>ills spaced a maximum o<br>s per board (or 1 nail per | ss of 7/16"inch attach<br>f 6" inches in the fiel<br>board if each board i | ed to the roof truss/rafter (s)<br>dOR- Dimensional lumbo | er/Tongue & Groove<br>nes in width)OR-       |  |  |  |
| _  | <del></del> -  |  |  |   | <del></del>                                  |  |  |  |

\*This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.

| Inspec        | tors      | Initials _            | EC Property Address 8741 WILES ROAD   | CORAL        | SPRINGS            | 33067      |
|---------------|-----------|-----------------------|---|--------------|--------------------|------------|
|               |           | dwelling f<br>No SWR. | from water intrusion in the event of roof covering loss.  or undetermined.  |              | •                  |            |
| 6. <u>Sec</u> |           | SWR (also             | r Resistance (SWR): (standard underlayments or hot-mopped felts do not qualify called Sealed Roof Deck) Self-adhering polymer modified-bitumen roofing un or foam adhesive SWR barrier (not foamed-on insulation) applied as a supplement               | derlaymen    | nt applied direct  | -          |
| $\times$      | C.        | Other Roo             | less than 2:12. Roof area with slope less than 2:12 sq ft; Total roff Any roof that does not qualify as either (A) or (B) above.  | )01 area     | sq 1t              |            |
|               | <u>B.</u> | Flat Roof             | Total length of non-hip features: feet; Total roof system perimeter: Roof on a building with 5 or more units where at least 90% of the main root less than 2:12. Roof area with slope less than 2:12.   | of area has  | a roof slope of    |            |
|               |           | Hip Roof              | Hip roof with no other roof shapes greater than 10% of the total roof system  | m perimete   | er.                |            |
|               |           |                       | What is the roof shape? (Do not consider roofs of porches or carports that are att over unenclosed space in the determination of roof perimeter or roof area for roof   | -            |                    |            |
|               | H.        | No attic a            | ccess   |              |                    |            |
|               |           |                       | or unidentified   |              |                    |            |
|               |           | Structural Other:     | Anchor bolts structurally connected or reinforced concrete roof.  |              |                    |            |
| _             |           |                       | Metal connectors consisting of a single strap that wraps over the top of the trust<br>both sides, and is secured to the top plate with a minimum of three nails on each   |              | secured to the     | wall on    |
|               |           | _                     | Metal Connectors consisting of 2 separate straps that are attached to the wall free beam, on either side of the truss/rafter where each strap wraps over the top of the a minimum of 2 nails on the front side, and a minimum of 1 nail on the opposite | ne truss/raf | fter and is secur  |            |
|               | D.        | Double W              | minimum of 2 nails on the front side and a minimum of 1 nail on the opposing raps   | side.        |                    |            |
|               | C.        | Single Wra            | Metal connectors consisting of a single strap that wraps over the top of the  |              | er and is secure   | ed with a  |
| $\Box$        | C         | C:1. W.               | position requirements of C or D, but is secured with a minimum of 3 nails.  | s/rarter and | d does not meet    | the nan    |
|               |           | 님                     | Metal connectors that do not wrap over the top of the truss/rafter, <b>or</b> Metal connectors with a minimum of 1 strap that wraps over the top of the truss   | c/rafter and | d does not meet    | the nail   |
|               | <u>B.</u> | Clips                 |   |              |                    |            |
|               |           | $\boxtimes$           | Attached to the wall top plate of the wall framing, or embedded in the bond beat the blocking or truss/rafter <b>and</b> blocked no more than 1.5" of the truss/rafter, at corrosion.   |              | _                  | p from     |
| 1711          | 1111114   |                       | Secured to truss/rafter with a minimum of three (3) nails, and  |              |                    |            |
| M             | nim.      | <br>ol conditio       | Metal connectors that do not meet the minimal conditions or requirements of B, ns to qualify for categories B, C, or D. All visible metal connectors are:   | , C, or D    |                    |            |
|               |           |                       | the top plate of the wall, or   |              | ranci and attaci   | ied to     |
|               | <u>A.</u> | Toe Nails             | Truss/rafter anchored to top plate of wall using nails driven at an angle through   | the truce/   | rafter and attack  | and to     |
|               |           |                       | achment: What is the <u>WEAKEST</u> roof to wall connection? (Do not include attage or outside corner of the roof in determination of WEAKEST type)   | ichment of   | f hip/valley jack  | s within   |
|               |           | No attic a            |   |              |                    |            |
|               |           |                       | or unidentified.  |              |                    |            |
| H             |           |                       | d Concrete Roof Beek.   |              |                    |            |
|               | 182       | 2 psf.                | d Concrete Roof Deck.   | a mean up    | onit resistance (  | or at leas |
|               | or        | greater resi          | stance than 8d common nails spaced a maximum of 6 inches in the field or has  | a mean ur    | olitt resistance o | ot at leas |

Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that is shown to have an equivalent

<sup>\*</sup>This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.

7. **Opening Protection:** What is the **weakest** form of wind borne debris protection installed on the structure? **First**, use the table to determine the weakest form of protection for each category of opening. Second, (a) check one answer below (A, B, C, N, or X) based upon the lowest protection level for ALL Glazed openings and (b) check the protection level for all Non-Glazed openings (.1, .2, or .3) as applicable. Non-Glazed **Opening Protection Level Chart Glazed Openings Openings** Place an "X" in each row to identify all forms of protection in use for each Windows opening type. Check only one answer below (A thru X), based on the weakest Garage Glass Entry Garage or Entry Skylights form of protection (lowest row) for any of the Glazed openings and indicate **Doors Block** Doors **Doors** Doors the weakest form of protection (lowest row) for Non-Glazed openings. Not Applicable-- there are no openings of this type on the structure X Α Verified cyclic pressure & large missile (9--Ib for windows doors/4.5 lb for skylights) В Verified cyclic pressure & large missile (4--8 lb for windows doors/2 lb for skylights) c Verified plywood/OSB meeting Table 1609.1.2 of the FBC 2007 Verified Non-Glazed Entry or Garage doors indicating compliance with ASTM E D 330, ANSI/DASMA 108, or PA/TAS 202 for wind pressure resistance Opening Protection products that appear to be A or B but are not verified Ν Other protective coverings that cannot be identified as A, B, or C Х No Windborne Debris Protection A. Exterior Openings Cyclic Pressure and 9-lb Large Missile (4.5 lb for skylights only) All Glazed openings are protected at a minimum, with impact resistant coverings or products listed as wind borne debris protection devices in the product approval system of the State of Florida or Miami-Dade County and meet the requirements of one of the following for "Cyclic Pressure and Large Missile Impact" (Level A in the table above). Miami-Dade County PA 201, 202, and 203 Florida Building Code Testing Application Standard (TAS) 201, 202, and 203 American Society for Testing and Materials (ASTM) E 1886 and ASTM E 1996 Southern Standards Technical Document (SSTD) 12 For Skylights Only: ASTM E 1886 and ASTM E 1996 For Garage Doors Only: ANSI/DASMA 115 A.1 All Non-Glazed openings classified as A in the table above, or no Non-Glazed openings exist A.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level B, C, N, or X in the table above A.3 One or More Non-Glazed Openings is classified as Level B, C, N, or X in the table above B. Exterior Opening Protection- Cyclic Pressure and 4 to 8-lb Large Missile (2-4.5 lb for skylights only) All Glazed openings are protected, at a minimum, with impact resistant coverings or products listed as windborne debris protection devices in the product approval system of the State of Florida or Miami-Dade County and meet the requirements of one of the following for "Cyclic Pressure and Large Missile Impact" (Level B in the table above): ASTM E 1886 and ASTM E 1996 (Large Missile – 4.5 lb.) • SSTD 12 (Large Missile – 4 lb. to 8 lb.) For Skylights Only: ASTM E 1886 and ASTM E 1996 (Large Missile - 2 to 4.5 lb.) B.1 All Non-Glazed openings classified as A or B in the table above, or no Non-Glazed openings exist B.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level C, N, or X in the table above B.3 One or More Non-Glazed openings is classified as Level C, N, or X in the table above C. Exterior Opening Protection- Wood Structural Panels meeting FBC 2007 All Glazed openings are covered with plywood/OSB meeting the requirements of Table 1609.1.2 of the FBC 2007 (Level C in the table above). C.1 All Non-Glazed openings classified as A, B, or C in the table above, or no Non-Glazed openings exist C.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level N or X in the table above C.3 One or More Non-Glazed openings is classified as Level N or X in the table above Inspectors Initials TEC Property Address\_8741 WILES ROAD **CORAL SPRINGS** 


33067


<sup>\*</sup>This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.


| N. Exterior Opening Protection (unverified shutter s   |   |  |  |  |  |
|--|---|--|--|--|--|
| protective coverings not meeting the requirements of Ar with no documentation of compliance (Level N in the tail                     |   | at appear to meet Answer "A" or "B"  |  |  |  |
| N.1 All Non-Glazed openings classified as Level A, B, C, or  | N in the table above, or no Non-Glazed  | d openings exist   |  |  |  |
| N.2 One or More Non-Glazed openings classified as Level I table above  |   |  |  |  |  |
| N.3 One or More Non-Glazed openings is classified as Leve  | l X in the table above  |  |  |  |  |
| X. None or Some Glazed Openings One or more Glaze  | d openings classified and Level X is  | n the table above.   |  |  |  |
| MITIGATION INSPECTIONS MUST B  | EE CERTIFIED BY A QUALIFIED   | INSPECTOR.   |  |  |  |
| Section 627.711(2), Florida Statutes, provi  |   |  |  |  |  |
| Qualified Inspector Name: THOMAS E. CHEEVER  | License Type: PROFESSIONAL ENGINEER   | License or Certificate #: P.E. 36054   |  |  |  |
| Inspection Company:<br>FLORIDA TECHNICAL, INC.   | Phone: 813-76   | 5-0264   |  |  |  |
| Qualified Inspector – I hold an active license as a  | : (check one)   |  |  |  |  |
| Home inspector licensed under Section 468.8314, Florida Statutes training approved by the Construction Industry Licensing Board a    |   | per of hours of hurricane mitigation   |  |  |  |
| Building code inspector certified under Section 468.607, Florida   | Statutes.   |  |  |  |  |
| General, building or residential contractor licensed under Section   | 489.111, Florida Statutes.  |  |  |  |  |
| Professional engineer licensed under Section 471.015, Florida Sta  | itutes.   |  |  |  |  |
| Professional architect licensed under Section 481.213, Florida Sta   | atutes.   |  |  |  |  |
|  | Any other individual or entity recognized by the insurer as possessing the necessary qualifications to properly complete a uniform mitigation verification form pursuant to Section 627.711(2), Florida Statutes. |  |  |  |  |
| Individuals other than licensed contractors licensed under Sunder Section 471.015, Florida Statues, must inspect the str             |   |  |  |  |  |
| Licensees under s.471.015 or s.489.111 may authorize a dire  |   |  |  |  |  |
| experience to conduct a mitigation verification inspection.  |   |  |  |  |  |
| I, THOMAS E. CHEEVER am a qualified inspector a (print name)   | nd I personally performed the ins   | Printed Copies Of This Document Are     Not Considered Signed And Sealed And |  |  |  |
| contractors and professional engineers only) I had my employ   | yee () pe   | The Signature Must Be Verified On Any Electronic Copies.                     |  |  |  |
|  | (print name of inspe  | Thomas Cheever   |  |  |  |
| and I agree to be responsible for his/her work.  | <u>:</u>  | No. 36054 No. 36054 No. 36054  |  |  |  |
| Qualified Inspector Signature:   | Date:   | * * * * <u>* * : * : * : * : * : * : * : *</u>                               |  |  |  |
|  | ,   | STATE OF   |  |  |  |
| An individual or entity who knowingly or through gross neg   | gligence provides a false or fraudu   | verification form is   |  |  |  |
| subject to investigation by the Florida Division of Insurance  | Traud and may be subject to ad  | ministrative action by the   |  |  |  |
| appropriate licensing agency or to criminal prosecution. (Secretifies this form shall be directly liable for the misconduct          |   |  |  |  |  |
| performed the inspection.  | of employees as if the authorized   | mitigation inspector personally  |  |  |  |
|  |   |  |  |  |  |
| <u>Homeowner to complete</u> : I certify that the named Qualified residence identified on this form and that proof of identification |   | •  |  |  |  |
| Signature:I  | Date:   |  |  |  |  |
|  |   |  |  |  |  |
| An individual or entity who knowingly provides or utters a   | false or fraudulent mitigation ver  | ification form with the intent to  |  |  |  |
| obtain or receive a discount on an insurance premium to which the individual or entity is not entitled commits a misdemeanor         |   |  |  |  |  |
| of the first degree. (Section 627.711(7), Florida Statutes)  |   |  |  |  |  |
|  |   |  |  |  |  |
| The definitions on this form are for inspection purposes onl as offering protection from hurricanes.                                 | y and cannot be used to certify ar  | ny product or construction feature   |  |  |  |
|  |   | ny product or construction feature  CORAL SPRINGS 33067                      |  |  |  |

inaccuracies found on the form.

## **BUILDING 14 – ROOF PHOTOS**

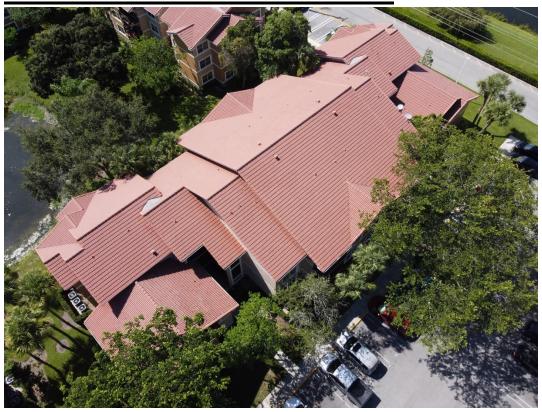

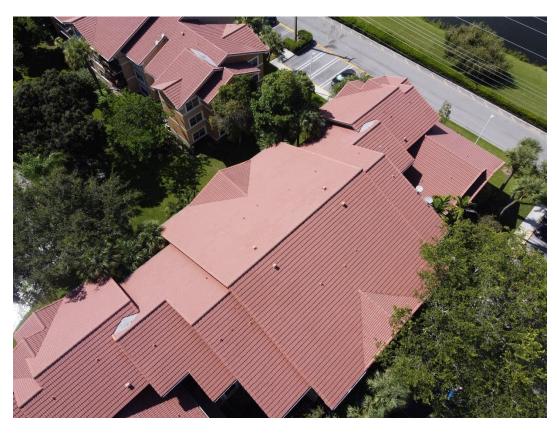

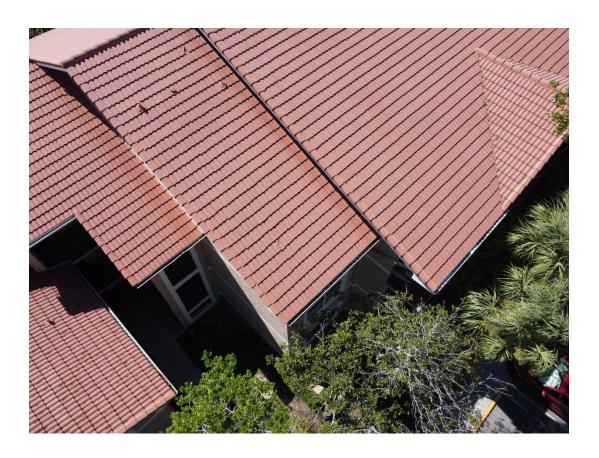



TEAR OFF OLD ROOF - 2013



TEAR OFF FELT AND SWR - 2013



FELT AT DRY IN - 2013



TU POLY-STICK WITH TILE LOAD - 2013



STRAP PHOTO - 2013



SWR INSTRALLATION - 2013



NAILS SHEATHING - 2013



NAIL SPACING - 2013



TILE LOADED FOR INSTALL - 2013